





Commercial Food Processing & Packaging Equipment

323-268-8514 800-421-6265 323-386-4058 (fax) www.mpbs.com

Features:

Stainless steel construction Fabricated to USDA standards

O/A dimensions: +/- 56 L x 25 W x 85" H

- Stainless steel legs have 7" adjustment
 - o Allows for 24 to 31" clearance under the grinder

Grinding capacity: +/- 7000 lb per hour (using a ½" holes plate)

Fully automatic feed

High output grinder for fresh or tempered meat

Hopper capacity: 175 lb

Alan Bradley safety switches

UL certified electronics

Standard Safety Features:

- Lockout
- Safety switch at tub grid cover
- Feed box cover switch
- Control voltage 24 VAC

Plate Size:

- Size 52 plate
 - o 5" Barrel, 5-1/8" plate

Motor:

- 208/230/460V / 60 Hz / 3 Ø
- Heavy-duty, 10 HP TEFC
- Conforms to NEMA specifications

Motor Controls:


- All machines come with motor controls as standard equipment
- User to supply over-current protection

Includes:

- #1 Hopper with safety grid hinged on side
- Adjustable legs
- Spurt guard
- Spanner wrench
- Instruction manual and parts list

Weight:

Shipping: +/- 1105 lbs

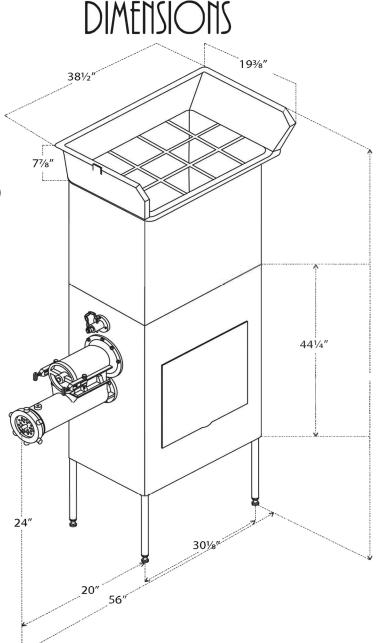

Options:

- Lid cover
- Various hoppers
- Conveyor for easy loading
- > Platform steps for operator to hand load machine
- Electrical

All specifications are subject to change without notice.

