







Commercial Food Processing & Packaging Equipmen

323-268-8514 800-421-626**5 323-386-4058** (fax) www.mpbs.com

Features:

Stainless steel construction Fabricated to USDA standards

O/A dimensions: +/- 73 L x 26 W x 106-1/2" H

- > Stainless steel legs have 12" adjustment
 - Allows for 28 to 40" clearance under the grinder

Grinding capacity: \pm -18000 lb per hour (using a ½" holes plate)

Fully automatic feed

High output grinder for fresh or tempered meat

Hopper capacity: +/- 175 lb

Alan Bradley safety switches

UL certified electronics

Standard Safety Features:

- Lockout
- Safety switch at tub grid cover
- Feed box cover switch
- Control voltage 24 VAC

Plate Size:

- Size 66 plate
 - o 8-5/8" Barrel, 8-5/8" plate

Motor:

- 208/230/460V / 60 Hz / 3 Ø
- Heavy-duty, 40 HP TEFC
- Conforms to NEMA specifications

Motor Controls:

- All machines come with motor controls as standard equipment
- User to supply over-current protection


Includes:

- #1 Hopper with safety grid hinged on side
- Adjustable legs
- Spurt guard
- Spanner wrench
- Instruction manual and parts list

Weight:

Shipping: +/- 1920 lbs

DIMENSIONS

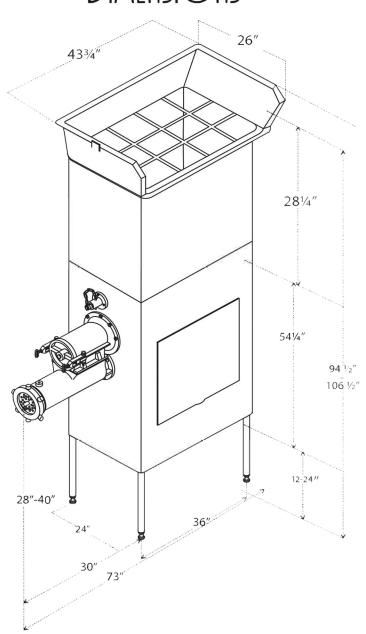

Options:

- Lid cover
- Various hoppers
- Conveyor for easy loading
- > Platform steps for operator to hand load machine
- Electrical

All specifications are subject to change without notice.

