

Features:

Stainless steel construction Fabricated to USDA standards Standard right hand

Cutting Capacity: 15.5 D x 18" H

O/A dimensions: 46 L x 37 W x 74-77" H

- Stainless steel legs have 3" adjustment
 - o Each leg adjustment allows for precise leveling

Saw Blade Wheels: Cast iron with tin-plated finish

Saw Blade: 5/8 W x 126" L Blade speed: 4000 FPM

Standard Safety Features:

- Two-hand start
- Lockout
- Short cut plate
- Lower blade cover

Start and Stop Control:

- Operated by push and pull hand grip rod
 - Start button must be pushed while pulling
 On rod to start

Table:

- Heavy gauge all stainless steel
- Rolling table
 - Table travels on 4 ball bearing rollers
- Locks when used as a stationary table
- Removes easily for cleaning without tools

Motor:

- 208/230/460V / 60 Hz / 3 Ø
- ➤ Heavy-duty, 3 HP TEFC
- Conforms to NEMA specifications


Motor Controls:

- Shipped with starter, overload protection And stop/start station
- User to supply over-current protection

Thickness Gauge:

- Stainless steel face plate
- ➤ 1" increments
 - Adjustable by hand wheel

DIMENSIONS

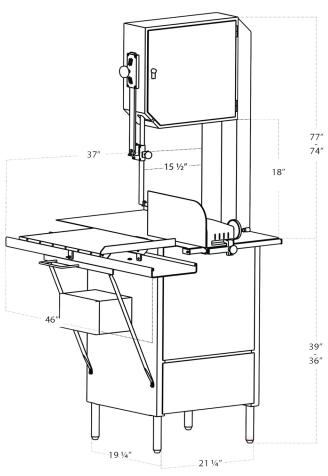

Includes:

- Blade
- Waste box
- > Instruction manual and parts list

Weight:

Net: +/- 450 lbs

➤ Shipping: +/- 600 lbs

Options:

➤ Blade speed: 6000 FPM

Left hand version (no additional cost)

Electrical

All specifications are subject to change without notice.

