## **Pro-Saw® SS-20 Band Saw**

#### THE ULTIMATE IN SAFETY AND SANITATION!

#### **Commercial Features:**

- All stainless steel construction
- Heavy-duty, 5 HP TEFC motor
- Right or Left hand
- Standard speed: 4000 FPM
- Revolutionary thickness gauge
- Fabricated to USDA standards

#### **Sanitation:**

- 100% Stainless wheels
- Sealed wheel bearings
- Removable front and rear table for easy cleaning
- Removable upper wheel and blade cleaner system
- Disassemble main components easily without tools
- Deep tray
- 100% Washdown

#### **Safety:**

- 2 Hand safety start feature
- Thumb protector
- Magnetic safety switches on both wheel covers
- Lower tension handle
- Emergency stop button

# Quality Dependability Service



We provide technical support and service for all machines that we sell.



2820 East Washington Blvd. Los Angeles CA 90023 323-268-8514 ♦ 323-386-4058 (fax) www.mpbsonline.com



### **Pro-Saw® SS-20 Band Saw**


**Emergency Stop Button** 

**Tension Handle** 

**Stationary Table** 

**Roller Table Assembly** 

NEMA IV Box

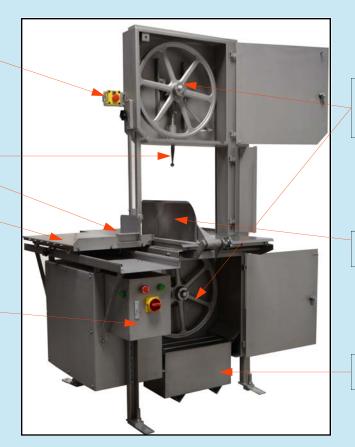


Stainless Steel Wheels w/ Sealed Bearings

**Meat Gauge Assembly** 

**Scrap Box** 

#### **Features:**

- Table lock feature
- Adjustable legs for precise leveling
- Sliding table (4 Delrin rollers)
- Standard speed: 4000 ft. per minute
- O/A dimension: 44.5 x 56.6 x 86.5"
- Cutting Area:
  - Stationary: 20 x 27.4"
  - Removable: 20 x 19.7"
  - Carriage: 17.4 x 28.7"
  - Loading: 27.8"
- Loading dimension: 20 x 20"
- Heavy-duty, 5 HP TEFC motor
- 208/220/440 V / 60 Hz / 3 Ø
- Motor Controls: Starter with stop/start control box
- Weight: Net 700 lb Shipping 805 lb
- Full crating available—ask for details
- Saw blades thickness: 5/8 x 154" Blades

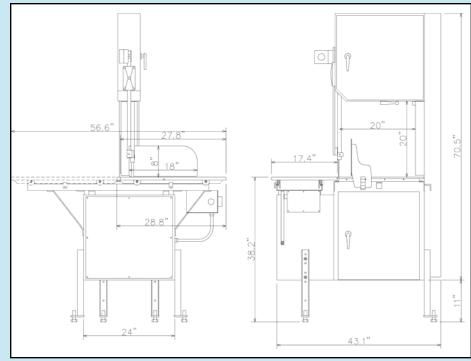



All specifications are subject to change without notice.